




# **Surface Mount Transient Voltage Suppressors**

### **Uni-directional**



### **Bi-directional**





## **Features**

- For surface mounted applications
- Low-profile package
- Ideal for automated placement
- Available in Unidirectional and Bidirectional
- 1000 W peak pulse power capability with a 10/1000 μs waveform
- Low incremental surge resistance, excellent clamping capability
- Very fast response time
- High temperature soldering guaranteed: 260 °C/10 s at terminals
- Meets MSL level 1
- Component in accordance to RoHS

## **Typical Applications**

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, telecommunication.

### **Mechanical Data**

- Package: DO-214AA (SMB)
   Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D
- **Polarity**: For uni-directional types the band denotes cathode end, no marking on bi-directional types

## ■Maximum Ratings (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Max	
Peak power dissipation, with a 10/1000us waveform (1) (2) (Fig.1)	P <sub>PPM</sub>	W	1000	
Peak pulse current, with a 10/1000us waveform <sup>(1)</sup>	I <sub>PPM</sub>	А	See Next Table	
Power dissipation, on infinite heat sink at TL=75°C	P <sub>D</sub>	W	5.0	
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only $^{(2)}$	I <sub>FSM</sub>	А	100	
Operating junction and storage temperature range	$T_J, T_STG$	°C	-55 to +150	
Electrostatic Discharge(IEC61000-4-2 air discharge)	ESD	10.7	±30	
Electrostatic Discharge(IEC61000-4-2 contact discharge)		KV		

## **■Electrical Characteristics** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Maximum instantaneous forward voltage @ at 50A for unidirectional only	V <sub>F</sub>	V	3.5



## **Thermal Characteristics** $(T_a=25^{\circ}\mathbb{C} \text{ Unless otherwise specified})$

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Thermal resistance(Typical)	$R_{\theta JL}$	°C/W	junction to lead	20
	$R_{\theta JA}$	°C/W	junction to ambient	100

#### Notes:

- (1) Non-repetitive current pulse, per Fig. 3 and derated above  $T_A$ = 25°Cper Fig.2.
- (2) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas


# ■Electrical Characteristics (Ta=25°C Unless otherwise specified)


Part Number	Part Number	Breakdown Voltage V <sub>BR</sub> @l <sub>T</sub>			Maximum Reverse Leakage	Working Peak	Maximum Reverse Surge	Maximum Clamping
(Uni)	(Bi)	Min(V)	Max (V)	I <sub>T</sub> <sup>(3)</sup> (mA)	I <sub>R</sub> <sup>(5)</sup> @ V <sub>RWM</sub> (μΑ)	Reverse Voltage V <sub>RWM</sub> (V)	Current I <sub>PP</sub> (4) (A)	Voltage Vc @ I <sub>PP</sub> (V)
1.0SMB6.8A	1.0SMB6.8CA	6.46	7.14	10	1000	5.8	95.2	10.5
1.0SMB7.5A	1.0SMB7.5CA	7.13	7.88	10	500	6.4	88.5	11.3
1.0SMB8.2A	1.0SMB8.2CA	7.79	8.61	10	200	7.0	82.6	12.1
1.0SMB9.1A	1.0SMB9.1CA	8.65	9.56	1	50	7.8	74.6	13.4
1.0SMB10A	1.0SMB10CA	9.50	10.50	1	10	8.6	69.0	14.5
1.0SMB11A	1.0SMB11CA	10.45	11.55	1	5	9.4	64.1	15.6
1.0SMB12A	1.0SMB12CA	11.40	12.60	1	5	10.2	59.9	16.7
1.0SMB13A	1.0SMB13CA	12.35	13.65	1	5	11.1	54.9	18.2
1.0SMB15A	1.0SMB15CA	14.25	15.75	1	5	12.8	47.2	21.2
1.0SMB16A	1.0SMB16CA	15.20	16.80	1	5	13.6	44.4	22.5
1.0SMB18A	1.0SMB18CA	17.10	18.90	1	5	15.3	39.7	25.2
1.0SMB20A	1.0SMB20CA	19.00	21.00	1	5	17.1	36.1	27.7
1.0SMB22A	1.0SMB22CA	20.90	23.10	1	5	18.8	32.7	30.6
1.0SMB24A	1.0SMB24CA	22.80	25.20	1	5	20.5	30.1	33.2
1.0SMB27A	1.0SMB27CA	25.65	28.35	1	5	23.1	26.7	37.5
1.0SMB30A	1.0SMB30CA	28.50	31.50	1	5	25.6	24.2	41.4
1.0SMB33A	1.0SMB33CA	31.35	34.65	1	5	28.2	21.9	45.7
1.0SMB36A	1.0SMB36CA	34.20	37.80	1	5	30.8	20.0	49.9
1.0SMB39A	1.0SMB39CA	37.05	40.95	1	5	33.3	18.6	53.9
1.0SMB43A	1.0SMB43CA	40.85	45.15	1	5	36.8	16.9	59.3
1.0SMB47A	1.0SMB47CA	44.65	49.35	1	5	40.2	15.4	64.8
1.0SMB51A	1.0SMB51CA	48.45	53.55	1	5	43.6	14.3	70.1
1.0SMB56A	1.0SMB56CA	53.20	58.80	1	5	47.8	13.0	77.0
1.0SMB62A	1.0SMB62CA	58.90	65.10	1	5	53.0	11.8	85.0
1.0SMB68A	1.0SMB68CA	64.60	71.40	1	5	58.1	10.9	92.0


### Notes:


- (3) Pulse test: t<sub>p</sub>≤50ms.
- (4) Surge current waveform per Fig. 3 and derated per Fig.2.
- (5) For bi-directional types having VRWM of 10 V and less, the  $I_{R}$  limit is doubled.


## ■ Characteristics (Typical)

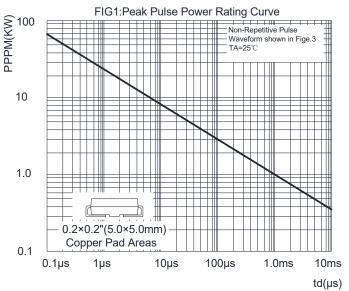


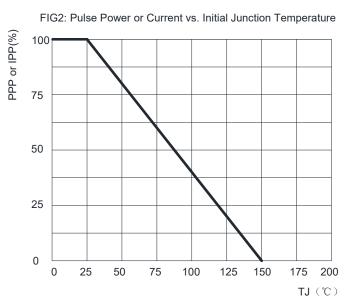

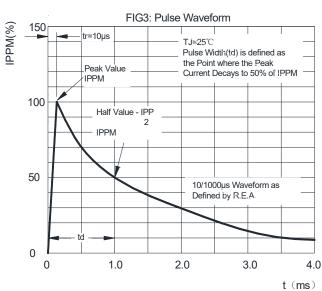

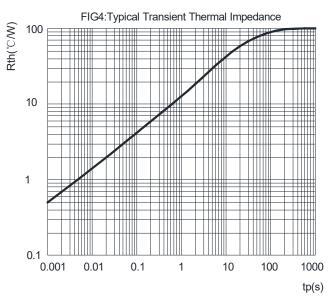

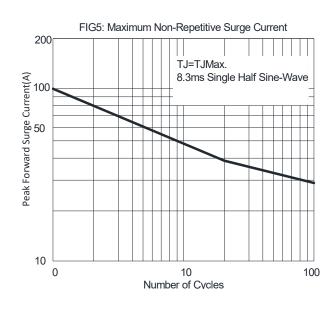


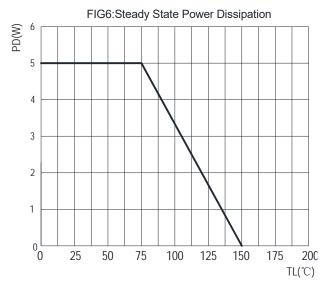

**■Ordering Information** (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
1.0SMB SERIES	F1	0.0975	3000	1	48000	13" reel
1.0SMB SERIES	F2	0.0975	750	3000	24000	7" reel
1.0SMB SERIES	F3	0.0975	500	2000	16000	7" reel

## **■ Outline Dimensions**

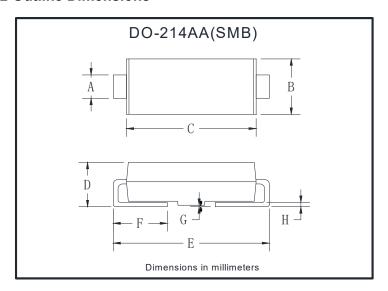

DO-214AA(SMB)			
Dim	Min	Max	
Α	1.85	2.15	
В	3.30	3.94	
С	4.05	4.75	
D	1.99	2.61	
Е	5.21	5.59	
F	0.90	1.41	
G	0.05	0.20	
Н	0.15	0.31	

# ■ Suggested pad layout

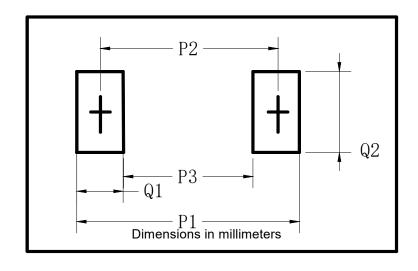

DO-214AA(SMB)		
Dim	Millimeters	
P1	6.8	
P2	4.3	
P3	1.8	
Q1	2.5	
Q2	2.3	



### **Disclaimer**

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.